


PRODUCT CODE:-

HFH-5 (Series)

CATEGORY:-


HANGING FUSE HOLDER

**BASIC DIMENSIONS
HFH-5-SERIES**

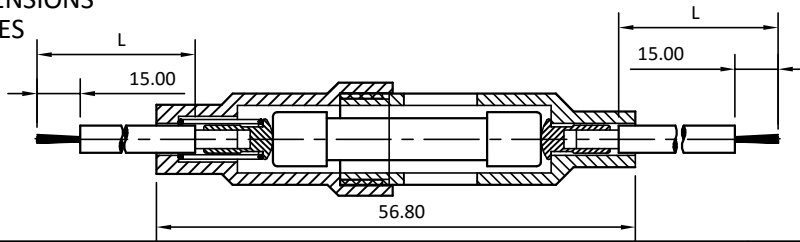


PRODUCT CODE	L
HFH-5	110.00
HFH-5-001	260.00

HFH-5-002

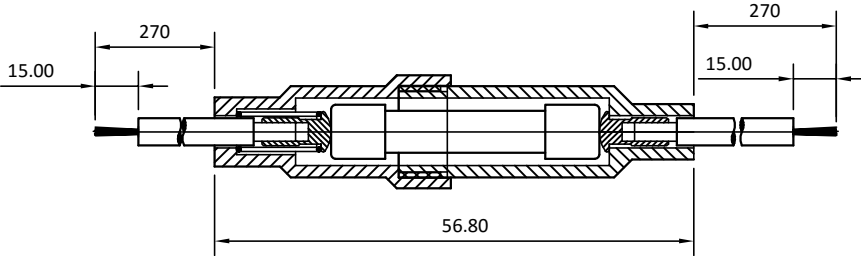

HFH-5-A

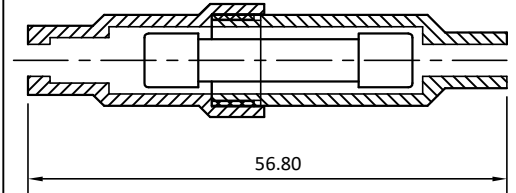


SPECIFICATION TABLE

SR. NO	PARAMETER		SPECIFICATION
1	Cap Design		Screw-In
2	V/A Rating (Standard)		12 Amp 250 V AC
3	Fuse Link Size (in mm)		Dia 6.3 x 32
4	Contact Resistance (Initial)		20 m Ohms Max.
5	Insulation Resistance at 500 V DC		1000 M Ohms Min.
6	H.V.Break Down Test (For 1 Minute)		2 KV AC
7	Mounting		Hanging / In line
8	Terminals		Solder Type.
9	Permissible Temperature	(a) With / Without Load	-20°C TO +85°C
		(b) For Soldering	270°C, 5 Sec Max
10	MATERIAL:	(a) Body	Nylon-Black / Polycarbonate-Transparent
		(b) Contacts	Brass ,Tin plating
11	Flexible Wires		1.5 Sq mm
12	Approvals		CE

ORDERING CODE

Type	SR. NO.	CURRENT RATING	WIRE SPECIFICATION		PRODUCT CODE	ROHS COMPLIED VARIETY	MATERIAL
			Cross Sectional Area in Sq. mm	Wire Diameter			
HFH-5 with wire	1	7 Amp	0.75	2.50	HFH-5 A	-	-
	2	12 Amp	1.00	2.75	HFH-5	-	-
	3	12 Amp	1.00	2.75	HFH-5-001	-	-
	4	15 Amp	1.5	2.95	HFH-5 B	-	-
	5	20 Amp	2.50	3.65	HFH-5 C	-	-
	6	12 Amp	1.00	2.50	-	HFH-5-002	-
	7	12 Amp	1.00	2.50	-	HFH-5-V	-
HFH-5 W w/o wires	8	12 Amp	Not applicable		HFH-5 W	-	-
HFH-5-A Only Housing & Cover	9	12 Amp	Not applicable		HFH-5-A	-	-

						APP	28.01.15	GJG	 <p>Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com</p>			
						CHK	28.01.15	PGP				
						DRN	28.01.15	PPD				
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN				
UNSP.TOLERANCE				DIMNS. IN mm	WT(Gm) Max.	SCALE:- NTS.	PROJECTION	SHEET	DRAWING NUMBER			
OVER	-	1	10						P H F H 2 0 0 1			
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.				1 OF 1	REVISION			
±	0.2	0.3	0.5						0			

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2018 by Elcom International Pvt.Ltd, India. All rights reserved