



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 6.3 x 32, CERAMIC BODY TIME DELAY FUSE

PART NO: PATC In



RATED VOLTAGE : 250 V
BREAKING CAPACITY : 1500A WHEN TESTED WITH AC CURRENT
CAP : BRASS, NICKEL PLATED
BODY : CERAMIC

MARKINGS ON THE FUSE CAP SHOULD BE AS FOLLOWS:-

TYPE OF FUSE (F), FUSE RATING, RATED VOLTAGE (250V), BREAKING CAPACITY (L)
& COMPANY'S IDENTIFICATION


NOMINAL CURRENT (In)	2.1 In MAX.	2.75 In		4 In		10 In	
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
200 mA – 10A	120 Sec	200 mSec	10 Sec	100 mSec	3 mSec	20 mSec	300 mSec



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 6.3 x 32, CERAMIC BODY TIME DELAY FUSE

PART NO: PATC In

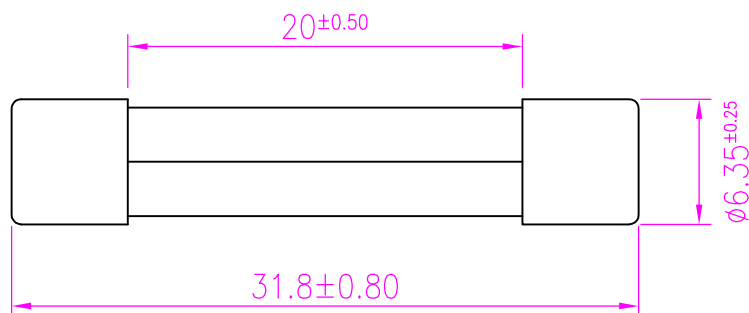


NOMINAL CURRENT RANGE (In)	VOLTAGE DROP DC (mV Max.)
200 mA	1200
250 mA	900
300 mA	1200
315 mA	650
400 mA	600
500 mA	510
630 mA	200
800 mA	110
1 A	100
1.25 A	100
1.50 A	100
1.6 A	100
2 A	100
2.5 A	100
3 A	100
3.15 A	100
3.5 A	100
4 A	100
5 A	100
6 A	100
6.3 A	100
8 A	100
10 A	100
12 A	100
15 A	100
>15 A	100

ORDERING INFORMATION

PATC... mA(In ≤ 800mA) OR
 PATC... A(In ≥ 1A)

A2	TOLERANCE UPDATED	VENILA	28.04.2015		
A1	INCLUDED 300mA, 1.5A & >15A, IN TABLE	VISHWA.P	03.09.2013		
A	ORIGINAL	SAMSON	14.07.2001		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.1mm
±1

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.