



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 6.3x30, GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PXF..VU In



RATED VOLTAGE : 32 V
BREAKING CAPACITY : 35A OR 10 In WHICHEVER IS GREATER,
WHEN TESTED WITH AC CURRENT

MARKINGS ON THE FUSE CAP SHOULD BE AS FOLLOWS:-


TYPE OF FUSE (F), FUSE RATING, RATED VOLTAGE (32V),
BREAKING CAPACITY (L) & COMPANY'S IDENTIFICATION



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 6.3x30, GLASS CARTRIDGE FAST ACTING FUSE

PART NO: PXF...VU In

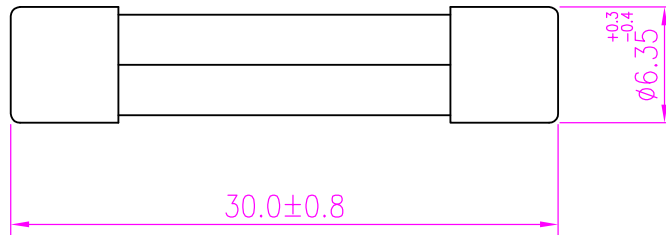

TIME CURRENT CHARACTERISTICS

NOMINAL CURRENT	1.5 In	1.35 In	1.1 In
	MAX.	MAX.	MIN.
In	15 Sec	180 Sec	2 Hour

NOMINAL CURRENT RANGE (In)	VOLTAGE DROP DC (mV Max.)
1 A	200
7 A	200
7.5 A	200
10 A	200
15 A	200
20 A	200

ORDERING INFORMATION

PXF...A VU(In>/=7A)
FOR ROHS PXF...A VU-R

A	ORIGINAL		08.10.2001		
A1	RATED VOLTAGE AND 1.1In TIME CHANGED		16.04.02		
A2	7.5A RATING INCLUDED		25.05.03		
A3	7 A RATING INCLUDED, TOLERANCE ON Ø6.35mm CORRECTED.		17.08.2006		
A4	1 A RATING INCLUDED	JEEVAN	12.02.2011		

REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY
	Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.1mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.